




ROCKLAND

DB DEMOLITION BUCKETS

ROUGH, TOUGH AND BUILT TO LAST

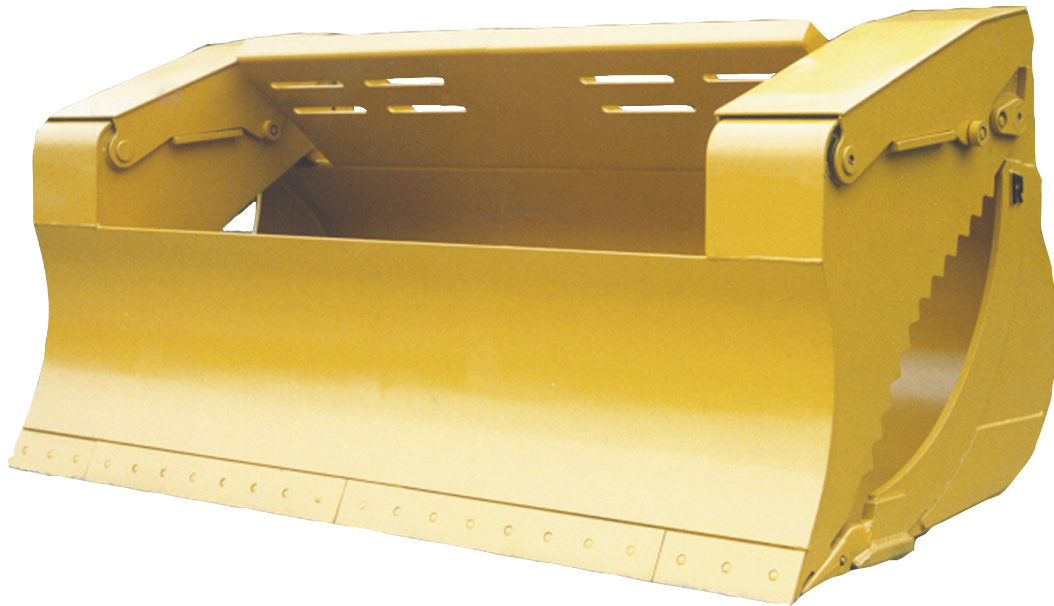

When you need a tough bucket for demolition work; when you need to dig, load, carry and doze, the Rockland DB Demolition Bucket is the ideal choice. This is much more than a modified multi-purpose bucket—it is designed specifically for demolition work.

These super tough buckets push over walls, grip and carry material using the clamp, load debris, and can be used with the clamp in the closed position to doze for leveling. DB Demolition Buckets and the heavy-duty clamps are made from high-strength alloy steel. Another standard feature is the extended spillplate. This helps protect the machine by keeping debris off the machine. The spillplate is slotted for improved operator visibility.

The moldboard is reinforced with heavy-duty box sections. Hydraulic cylinders are completely protected for years of dependable service. They are equipped with special heat-treated, extra hard, chrome plated rods and high pressure seals.

These super rugged demolition buckets are designed to take the abuse and go the distance in severe service demolition work day after day, month after month, year after year. Heavy and tough, DB Demolition Buckets are built specifically for demolition work or general contracting.

Bolt-on cutting edges and replaceable end bits are standard. DB Demolition Buckets can be equipped with the teeth of your choice.



Rockland's DB Demolition Bucket looks tough, and it is tough!



DESIGNED FOR DEMOLITION

Rockland DB Demolition Buckets are equipped with first class hydraulics. High pressure cylinders and special heat-treated, hard chrome plated rods deliver years of dependable service.

The hydraulic cylinders are enclosed to completely protect them from any debris that may spill over the clamp.

DB Buckets and clamps are built from high strength, heat-treated alloy steels—they are built to last in the Rockland tradition.



SPECIFICATIONS

Category	30	40	40	50
Capacity (Yd ³)	2 <i>1.53</i>	2.5 <i>1.91</i>	2.75 <i>2.10</i>	3 <i>2.29</i>
Width (")	106 <i>2692</i>	108 <i>2743</i>	116 <i>2946</i>	120 <i>3048</i>
Weight (lbs.)	5900 <i>2676</i>	6870 <i>3116</i>	7355 <i>3336</i>	7845 <i>3558</i>

Category	50	60	70	80
Capacity (Yd ³)	4 <i>3.06</i>	4 <i>3.06</i>	5 <i>3.82</i>	7 <i>5.35</i>
Width (")	120 <i>3048</i>	126 <i>3200</i>	136 <i>3454</i>	149 <i>3785</i>
Weight (lbs.)	9030 <i>4096</i>	10215 <i>4634</i>	10800 <i>4899</i>	11090 <i>5030</i>

(mm/kg)

Specifications subject to change without notice.

INSTALLATION INFORMATION

All Rockland DB Demolition Buckets mount in place of the bucket using factory pins or specified coupler brackets. The loader must be equipped with a three-spool valve and boom arm piping. DB Buckets come complete with jumper hoses

WARRANTY

Rockland DB Demolition Buckets are guaranteed against failure due to defective design, workmanship or materials for a period of two years or 4,000 hours.



Distributed by:

ROCKLAND MANUFACTURING CO.
P.O. Box 5 Bedford, PA 15522
800-458-3773 www.rocklandmfg.com